





经纬纺织机械股份有限公司榆次分公司  
JINGWEI TEXTILE MACHINERY CO.,LTD.YUCI BRANCH

# JW-PROTTI PT系列型电脑横编机

## PT SERIE FLAT KNITTING MACHINE

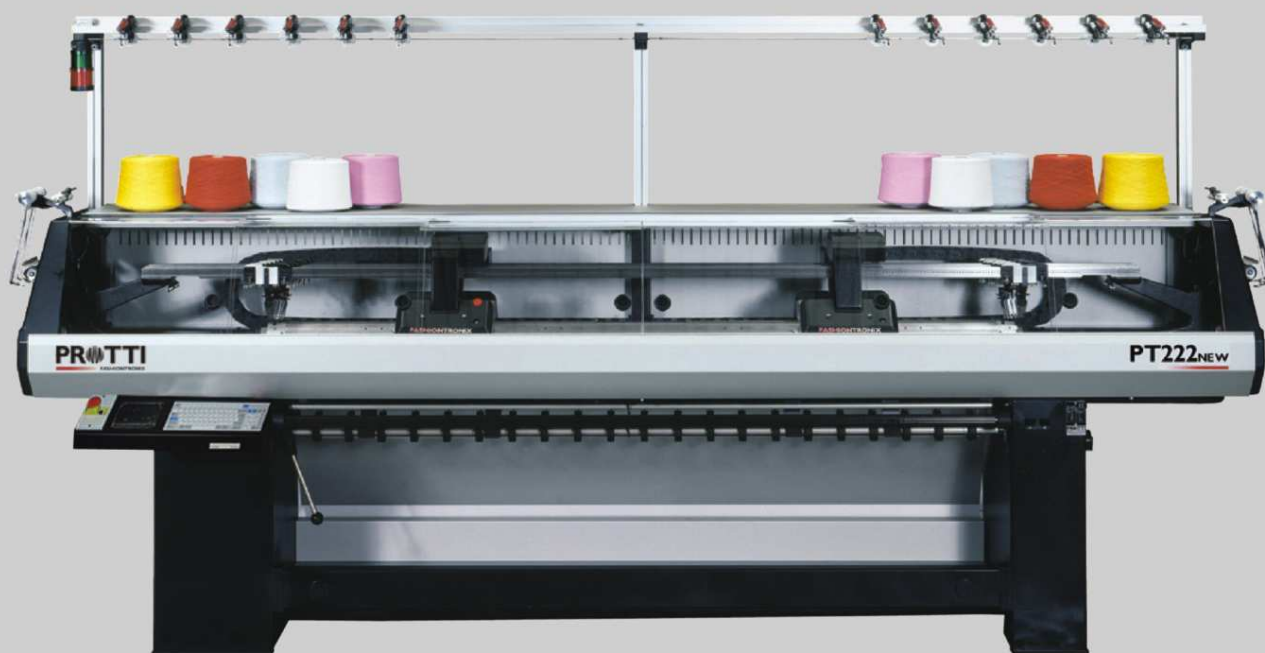

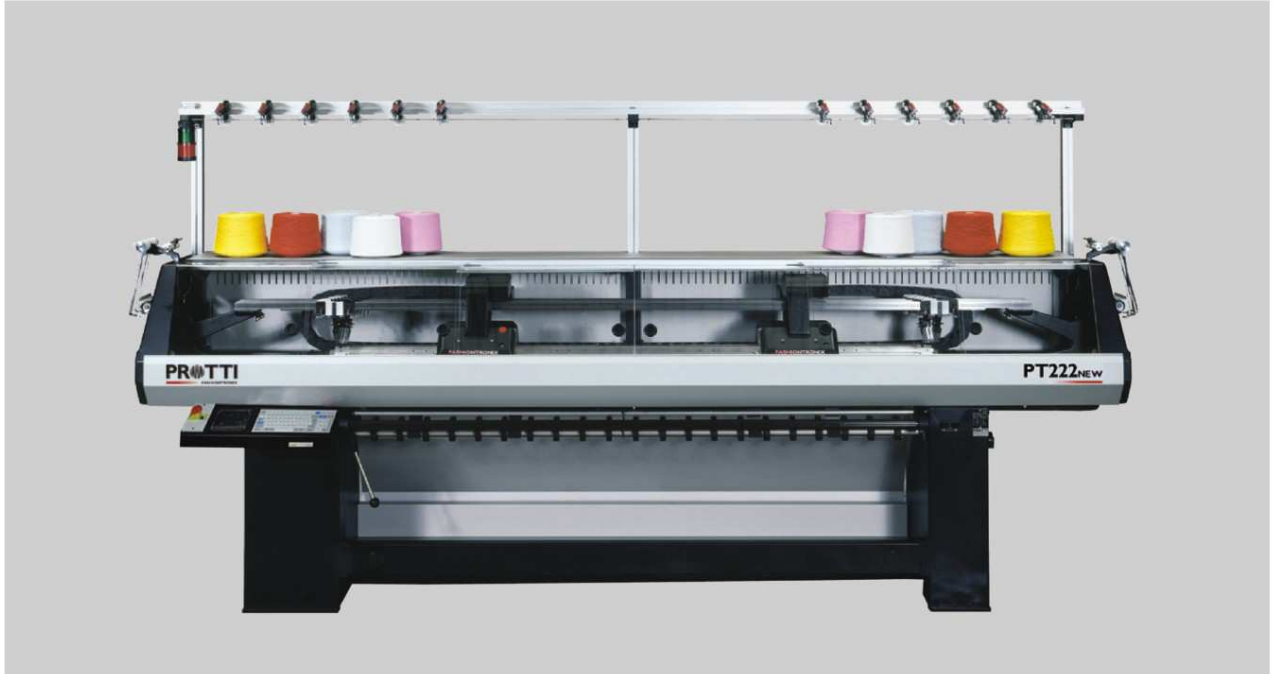

**PT222: 机号5-6-7-8-10-12-14-16-18**

**Gauges PT222: 5-6-7-8-10-12-14-16-18**

**PT22J: 机号7-8-10-12-14-16**



**Gauges PT22J:7-8-10-12-14-16**

**PT223: 机号7-8-10-12-14-16-18,20 ( 针床隔距 E18 )**

**Gauges PT223: 7-8-10-12-14-16-18,20 ( with needle E18 )**

Pt系列，可配高低片踵，用于编织简单织物或有色织物。该系列也适用于两个或三个单系统合并机头。

It is a series of electronic flat knitting machines; the model PT new with high and low butt needles, is designed to produce simple linear structures of stitch and/or color. The models PT new is fitted with two or three separate single system "carriages which can alsowork in tandem."

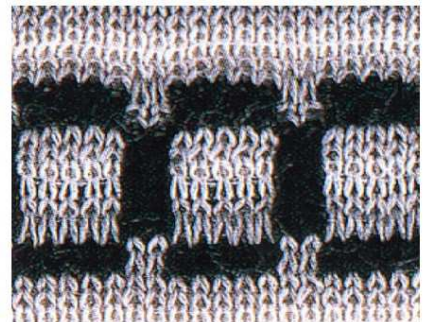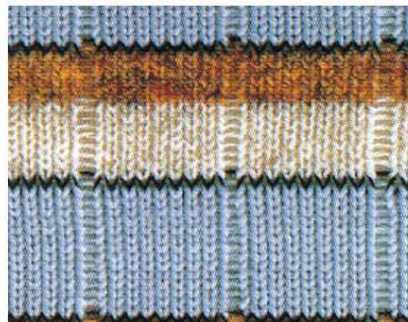

技术特性 Technical Features	PT222	PT22J	PT223
针床 Needle beds cm/inch	cm218 (86")		
工作幅宽 Working width cm/inch	合并机头 United Carriages cm.218 (86")	合并机头 United Carriages cm.218 (86")	合并机头 United carriages: 单系统 in one system cm.218 (86") 双系统 in two systems cm.218 (86") 三系统 in three systems cm.180 (71")
	分离机头 Separate carriages cm.97 (38"X2)	分离机头 Separate carriages cm.101,6 (40"x2)	分离机头 Separate carriages: 两个衣片 for two fabrics cm.101,6 (40"x2) 三个衣片 for three fabrics cm.64,4 (25,35"x3)
机号 Gauges	5-6-7-8-10-12-14-16-18	7-8-10-12-14-16	7-8-10-12-14-16-18, 20(针床隔距/with needle E18)
选针器 Selection	高低片踵 Hight Butt and Low Butt needles	高低片踵 Hight Butt and Low Butt needles 两级选针 Two Platines Selection	高低片踵 Hight Butt and Low Butt needles
机头/系统数量 No. of carriages and system	双机头, 单系统 Two carriages, one system each	双机头, 单系统 Two carriages, one system each	三机头, 单系统 Three carriages, one system each
翻针 Stitch transfer	从左到右; 前到后 from left to right : front to rear 从右到左; 后到前 from right to left: rear to front	否 not possible	否 not possible
针床横移 Racking	最大横移50.8mm(2" ), 1/2针距分两步横移, 速度可调 Max 50,8mm (2" ) 1/2 real, 1/2 transfer, each position is adjustable +/- 0,1mm Racking in two time and adjustable speed		
线圈三角 Stitch cam	31段独立可调 31 Position adjustable individually		
牵拉 Take down	主牵拉辊独立可调 Main roller in separated and adjustable sectors		
纱嘴 Yarn Carriers	12个纱嘴排列在三根双向导轨上, 每个机头配6个纱嘴 12 Yarn Carriers in three double guide bars, 6 feeders each carriages	12个纱嘴排列在三根双向导轨上, 每个机头配6个纱嘴 12 Yarn Carriers in three double guide bars, 6 feeders each carriages	12个纱嘴排列在三根双向导轨上, 每个机头配4个纱嘴 12 Yarn Carriers in three double guide bars, 4 feeders each carriages
张力臂 Tension arms	12个上张力臂, 遇到节点停车或降速 12 Upper tension arms with knots stoppers and speed slowing		
编织速度 Knitting speed	最大1.5m/s.随着机号和编织条件的变化而变化 Max 1,5 m/sec.Working speed may change according with gauge and knitting conditions. 每个程序有7段可调 7 Adjustable values each knitting program		
安全检测 Security measures	设计生产制造符合CE规则 Designed, built and marked in compliance to the CE rules		
驱动器 Drives	3.5软盘 1.44Mb - USB - CF卡 Floppy Disk 3,5" 1,44Mb - USB reader - Compact Flash Hard Disk		
显示 Display	640X480像素, 多语言LCD显示 640x480 pixel LCD with software in different languages		
电源 Electric supply	三相交流220V,380V410V断电保存参数 3 Phases AC 220V, 380V or 410V, Save data in power down		
功率 Maximum power	1Kw	1Kw	1,4Kw
选配 On request	左右两侧积极喂纱 Positive feeding devices on left and right side		
净重 Net Weight kg	Kg.1.000	Kg.1.040	Kg.1.080
毛重 Gross Weight kg	Kg.1.400	Kg.1.440	Kg.1.480
包装尺寸 Crate dimentions mm	长length 3.890mm - 高Height 1.805mm - 宽Width 1.020mm		

**经纬纺织机械股份有限公司榆次分公司**  
**JINGWEI TEXTILE MACHINERY CO.,LTD.YUCI BRANCH**

地 址：山西省晋中市榆次区经纬南路1号

邮 编：030601

电 话：0354 - 2492875 2492877

传 真：0354 - 2425604

网 址：www.jwyc.com

电子信箱：jwfjb@jwyc.com

Add: No.1 ,Jingwei South Road.Yuci,Shanxi,P.R.China

Zip code: 030601

Tel: +86 354 2492584 2492585

Fax: +86 354 2426884

Http: www.jwyc.com

E-Mail: jwgmb@jwyc.com

产品规格与外观可能有变更，恕不预先通知

The specifications of the machine are subject to change without prior notice.