




经纬纺织机械股份有限公司榆次分公司  
JINGWEI TEXTILE MACHINERY CO.,LTD.YUCI BRANCH

# JW-PROTTI <sup>PV2C</sup>/<sub>PV3C</sub> 型电脑横编机 FLAT KNITTING MACHINES ( FLEX )



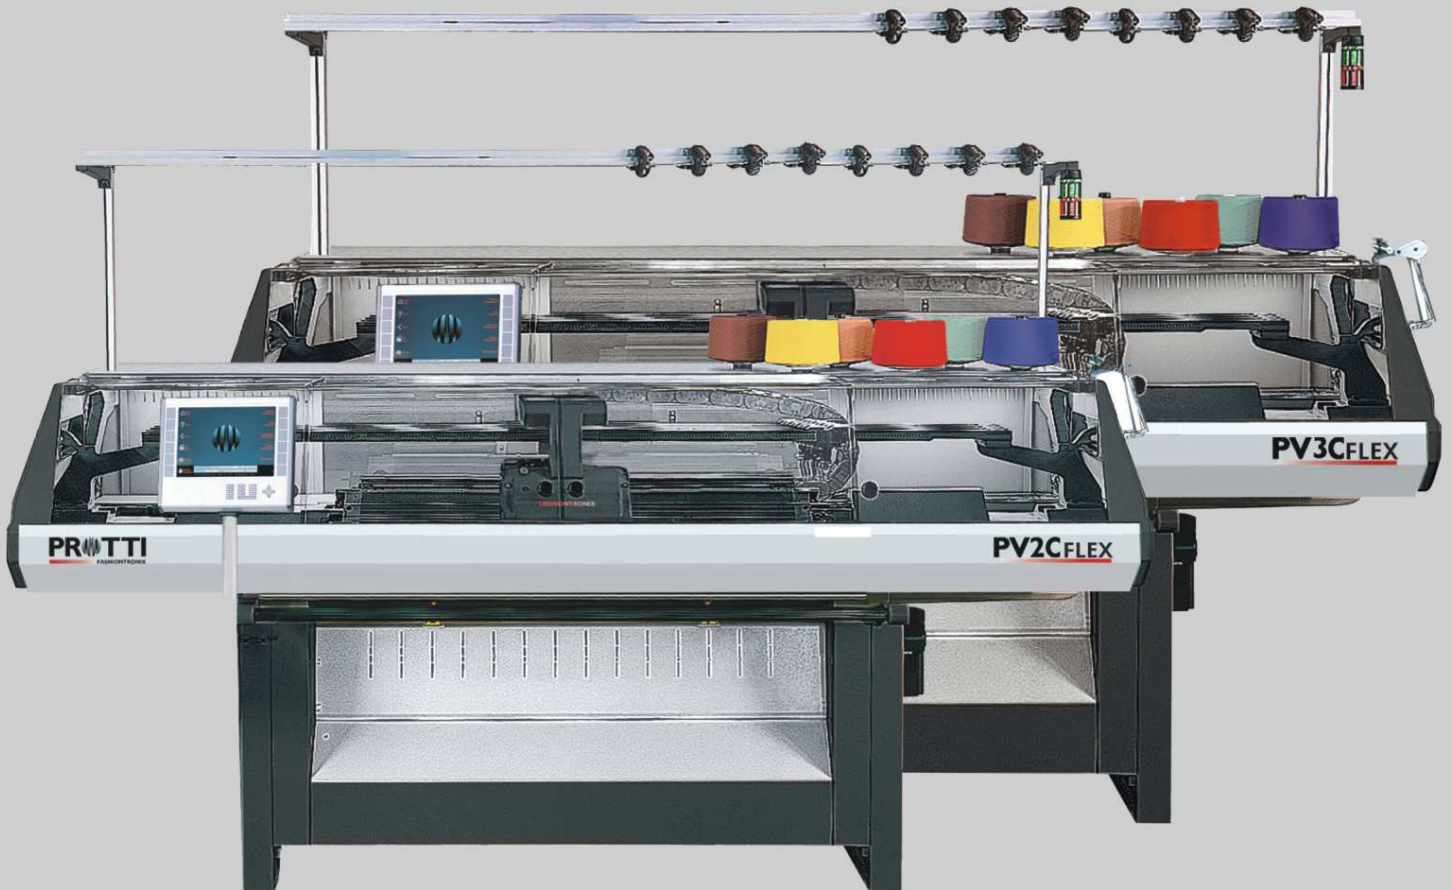

**PV2C: 机号 E4-5-6-7-8-10-12-14-16-18**

Gauges PV2C: E4-5-6-7-8-10-12-14-16-18

**PV2C多针距: 机号E5-E7-E12-E14**

Gauges PV2C FLEX: E5-E7-E12-E14

**双系统 No. of systems 2**

**PV3C: 机号 E4-5-6-7-8-10-12-14-16**

Gauges PV3C: E4-5-6-7-8-10-12-14-16

**PV3C多针距: 机号E5-E7-E12-E14**

Gauges PV3C FLEX: E5-E7-E12-E14

**三系统 No. of systems 3**

该系列是单机头双系统或三系统电脑横机，分级选针器，电子编程，用于生产提花、结构组织及成型织物，可实现变针距编织。

It is a series of flat knitting machines fitted with 2 or 3 systems and one carriage, with needle by needle selection and electronic programming, for the production of jacquard, structured and shaped knitwear with the possibility to knit different gauges on the same fabric.



	PV2C	PV2C	PV3C	PV3C
机头/系统数量 N° of carriages/systems	1/2	1/2	1/3	1/3
编织系统 Knitting systems	2	2	3	3
分级选针器 Needle by needle selection with N° of selection groups	16	16	24	24
针床长度 Needle bed length cm/inch	130/52"	110/44"	130/52"	110/44"
机号 Gauges	from 4 to 10	from 12 to 18	from 4 to 10	from 12 to 16
多针距技术 Flexible gauge (FLEX)	5 and 10	12 and 14	5 and 10	12 and 14
可更换齿口片 Interchangeable jacks	●	●	●	●
沉入式织针 Sinkable needles	●	●	●	●
后针床横移, 编程控制 Programmable rear needle bed racking max	4"	4"	4"	4"
前针床翻转 Rotating front needle-bed	●	●	●	●
编织与翻针同步 Combined knitting and stitch transfer	●	●	●	●
自由翻针 Simultaneous double stitch transfer independently from carriage direction	●	●	●	●
三种编织技术 (成圈、集圈、浮线) 3 technical selections for knitting (knit, tuck, miss)	●	●	●	●
长短线圈可选 2 technical selections for stitch length (long and short stitches)	-	-	-	-
动态密度 Dynamic variation of stitch length	●	●	●	●
分针与编织/翻针同步 Split device integrated in knitting/transfer system	●	●	●	●
沉降片 (压、半压、不压) Sinker system with two positions of action + out of action	●	-	●	-
4根纱嘴导轨 4 yarn carriers guide bars	●	●	●	●
标配纱嘴数量 Yarn carries in standard equipment	8	8	8	8
上张力臂, 双重检测节点 Upper tension arms with knot double check	8	8	12	12
右侧张力臂 Lateral tension arms on right side	8	8	8	8
右侧纱夹和纱剪 Blocking and yarn cutting device on right side	●	●	●	●
磁性锥形纱管座 Magnetic cone holder	8	8	12	12
主牵拉辊, 编程控制 Programmable Main take down roller	●	●	●	●
上皮辊辅助牵拉辊 Upper rubber take down roller	-	●	-	●
起底板 Set up comb	●	●	●	●
倒卷自停机构 Automatic stop motion when fabric rolls up	-	●	-	●
落片自停机构 Automatic stop motion when fabric falls down	●	-	●	-
可变动程 Variable stroke	●	●	●	●
最大编织速度 Max knitting speed m/sec	1.3	1.3	1.3	1.3
润滑系统 Oiling system device	●	●	●	●
滑动透明机头防护罩 Sliding transparent carriage protections	●	●	●	●
启动/停车操纵杆 Start and stop bar	●	●	●	●
设计生产制造符合CE规则 Designed, built and marked - in compliance to CE rules	●	●	●	●
信号灯 Lighting signals	●	●	●	●
报警 Acoustic warning	●	●	●	●
多操作系统, RAM内存 Multiprocessor, RAM memory	●	●	●	●
键盘 Keyboard control	●	●	●	●
自检程序 Auto diagnosis Program	●	●	●	●
LCD显示 Display LCD	●	●	●	●
1.44Mb软盘和USB输入 Floppy disk 1.44 Mb and USB Pen Drive	●	●	●	●
硬盘 Hard disk 128 Mb	●	●	●	●
多语言菜单 Menu system in different languages	●	●	●	●
机器长度 Length of machine in mm.	2894	2894	2894	2894
机器宽度 Width machine in mm.	918	918	918	918
机器高度 Height of machine in mm.	1330/2030	1330/2030	1330/2030	1330/2030
包装箱长度 Length of crate in mm.	3100	3100	3100	3100
包装箱宽度 Width of crate in mm.	1100	1100	1100	1100
包装箱高度 Height of crate in mm.	1915	1915	1915	1915
机器重量 净重/毛重 Weight of machine in Kg net/gross	1950/1620	1350/1720	1950/1620	1350/1720

● 标配 OF SERIES      - 不能配 NOTAVAILABLE



**经纬纺织机械股份有限公司榆次分公司**  
**JINGWEI TEXTILE MACHINERY CO.,LTD.YUCI BRANCH**

地 址：山西省晋中市榆次区经纬南路1号

邮 编：030601

电 话：0354 - 2492875 2492877

传 真：0354 - 2425604

网 址：www.jwyc.com

电子信箱：jwfjb@jwyc.com

Add: No.1 ,Jingwei South Road.Yuci,Shanxi,P.R.China

Zip code: 030601

Tel: +86 354 2492584 2492585

Fax: +86 354 2426884

Http: www.jwyc.com

E-Mail: jwgmb@jwyc.com

产品规格与外观可能有变更，恕不预先通知

The specifications of the machine are subject to change without prior notice.